arXiv:1304.6048v1 [physics.geo-ph] 22 Apr 2013

Rock physics and geophysics for unconventional resource, multi-component seismic, quantitative interpretation

Michael E. Glinsky,[1] Andrea Cortis,[1] Doug Sassen,[1] Howard Rael,[1] and Jinsong Chen[2]
[1] *ION Geophysical, Houston, TX, USA*
[2] *Lawrence Berkeley National Laboratory, Berkeley, CA, USA*

An extension of a previously developed, rock physics, model is made that quantifies the relationship between the ductile fraction of a brittle/ductile binary mixture and the isotropic seismic reflection response. Making a weak scattering (Born) approximation and plane wave (eikonal) approximation, with a subsequent ordering according to the smallness of the angle of incidence, a linear singular value decomposition analysis is done to understand the stack weightings, number of stacks, and the type of stacks that will optimally estimate the two fundamental rock physics parameters. It is concluded that the full PP stack and the "full" PS stack are the two optimal stacks needed to estimate the two rock physics parameters. They dominate over both the second order AVO "gradient" stack and the higher order (4th order) PP stack.

I. INTRODUCTION

The developing commercial significance of unconventional shale reservoirs is leading to the need to be able to remotely determine the ability to effectively fracture the reservoir. This paper will establish the theory and practicality of optimally estimating the ductile fraction from an isotropic analysis of surface conventional and converted wave seismic. This property of a binary ductile/brittle mixture has been shown to be the key property in determining the geomechanical fracturing response of an unconventional reservoir[1]. This is, most likely, because of the balance between the "bumpy road" friction of the fracture, due to the structurally competent brittle member, and the viscous friction, due to the ductile member. This is not the subject of this paper, but is the topic of our ongoing research into the statistical mechanics of fracture joint friction.

Because of unrelated physics, the same property, ductile fraction, is one of two important order parameters for the linear, isotropic, elastic response of binary mixtures of a structurally competent member (high coordination number) and a structurally less competent member (lower coordination number). A very important implication of this bicritical model is that the state is only two dimensional. The expectation, and practical reality (as demonstrated by analysis of well log data) is that the isotropic properties will reduce to a surface in the three dimensional density, compressional velocity, shear velocity (i.e., ρ, v_p, v_s) space. Furthermore, this surface will be orthogonal to the v_p-v_s plane. This remarkable property is captured by the floating grain model[2,3] which has two state variables given by the floating grain fraction, f_f, and the compaction state as specified by $1 - \exp(-P_e/P_0)$, where P_e is the effective stress and P_0 is a reference value of effective stress. Two phase transitions points at critical values in the radius ratio ($RR_c = 4$) and the fraction of small grains ($VF_c = 0.45$) were demonstrated, as well as two critical scalings of the porosity about a critical point of about 42%[4].

This theory was developed for a binary mixture of brittle spheres of two different sizes. Recognizing that the large spheres are the structurally competent member and the small spheres are the structurally less competent member, we generalize this theory in Sec. II. The floating grain fraction is replaced by a general geometry parameter, ξ, which in the case of shales is shown to be proportional to the $\sqrt{f_d}$, where f_d is the ductile fraction. The geometry parameter captures the fabric of the mixture such as the sorting or ductile fraction, while the composition parameter captures the compaction, diagenesis, and/or mineral substitution of the mixture. An important additional implication of the bicritical model is a fundamental self similarity and the associated scaling relationships of physical quantities such as coordination numbers, capture fractions, and elastic moduli. It also implies the same critical scaling for both v_p and v_s because they have the same units. Therefore the surface in (ρ, v_p, v_s) space must be orthogonal to the v_p-v_s plane.

We emphasize the serendipity of the fact that the ductile fraction is the coordinate of influence of both the linear elastic response (geophysical) and the nonlinear inelastic response (geomechanical). For the former, the ductile material is adding density without much structural rigidity, that is elastic moduli. For the latter, it is increasing the importance of the viscous joint friction.

Given this rock physics model, this paper examines its implication on the geophysical detectability of ductile fraction in Sec. III. Several questions have been the subject of much debate within the geophysical community. How many stacks should be used in "prestack" analysis? What should those stacks be? What is the relative value of AVO versus converted wave analysis? What are the quantities that should be inverted for, relative (reflectivity) versus absolute (impedances)? Finally, what are the "attributes" that best predict reservoir performance?

We present a straight forward analytic theory in Sec. IV and subsequent analysis that answers all of these questions. It is a linear singular value decomposition analysis of the relationship between the two fundamental rock physics parameters (ζ and ξ) and the seismic reflectivities (PP and PS) as functions of angle of incidence, θ. This analysis is done assuming a weak scattering (Born) approximation and plane wave assumption (eikonal). It also orders the SVD using the angle θ. The conclusion is that the PP full stack and the PS "full" (linear weighted with θ or offset) stacks are optimal in the estimation of ζ and ξ, respectively. They are of zeroth and first order in θ, respectively. Conventional AVO "gradient" stacks and large angle PP response conventionally used to estimate density are of higher order in θ (second and fourth order, respectively). It should be noted that these stacks are average reflectivities or relative quantities. Linear combinations of these two important stacks (normally just the full PP stack for ζ and the "full" PS stack for ξ) are the best "attributes".

II. ROCK PHYSICS

We first recognize that we are dealing with a binary mixture of a ductile and a brittle member, where the latter is more structurally competent than the former. We now take inspiration from the floating grain model[2]. This model is based on two fundamental parameters – the floating grain fraction parameterized by $\xi = f_f/f_{fc}$ and the compaction parameterized by $\zeta = 1 - \exp(-P_e/P_0)$, where f_f is the floating grain fraction, f_{fc} is the maximum or critical floating grain fraction, P_e is the effective stress, and P_0 is a reference effective stress. The model respects fluid substitution and leads to local linear correlations of the form

$$v_p = A_{vp} + B_{vp}\,\zeta + C_{vp}\,\xi \;\pm \sigma_{vp}, \tag{1}$$

$$\phi = A_\phi + B_\phi\, v_p + C_\phi\,\xi \;\pm \sigma_\phi, \text{ and} \tag{2}$$

$$v_s = A_{vs} + B_{vs}\, v_p \;\pm \sigma_{vs}. \tag{3}$$

The second relationship can be rewritten two ways, given ρ_s and ρ_f and the definition $\rho \equiv \phi\,\rho_f + (1-\phi)\rho_s$,

$$\phi = \phi_c - \frac{\phi_c}{n_\zeta}\,\zeta - \frac{\phi_c}{n_\xi}\,\xi, \text{ and} \tag{4}$$

$$\rho = A_\rho + B_\rho\, v_p + C_\rho\,\xi \;\pm \sigma_\rho. \tag{5}$$

The first identifies the two critical exponents, n_ζ and n_ξ, and the critical porosity, ϕ_c. The second is just a convenient expression to compare to log data of shales.

When we examine shales from many different wells and plays, we get the results shown in Fig. 1. It is important to note the strong linear correlation in the v_p-v_s plane of Fig. 1a, and the systematic shift in the ρ-v_p correlation with the ductile fraction, f_d, in Fig. 1b. Inspired by the floating grain model, we generalize ζ to $(f_d/f_{dc})^{n_d}$, where f_d is the ductile fraction, f_{dc} is the maximum or critical ductile fraction, and n_d is the critical exponent for the ductile fraction. Given the range of the data, we assume the line in Fig. 1b shows the variation in the ρ-v_p as ξ goes from 0 to 1 for $\zeta = 1$, and we assume that the minimum value of v_p is 9500 ft/s when $\zeta = \xi = 0$. A regression to this extended rock physics model leads to $A_{vp} = 9500$ ft/s, $B_{vp} = 8500$ ft/s, $C_{vp} =$ -4500 ft/s, $\sigma_{vp} = 350$ ft/s, $A_\phi = 0.771$, $B_\phi = -3.68 \times 10^{-5}$ s/ft, $C_\phi =$ -0.1916, $\sigma_\phi = 0.017$, $A_{vs} = 1280$ ft/s, $B_{vs} = 0.48$, $\sigma_{vs} = 216$ ft/s, $\phi_c = 0.421$, $n_\zeta = 1.34$, $n_\xi = 16.4$, $n_d = 0.5$, $f_{dc} = 0.52$, $A_\rho = 1.435$ gm/cc, $B_\rho = 7.0 \times 10^{-5}$ (s/ft)(gm/cc), $C_\rho = 0.364$ gm/cc, and $\sigma_\rho = 0.032$ gm/cc. We have assumed $\rho_s = 2.9$ gm/cc and $\rho_f = 1.0$ gm/cc in these relationships. We note that there was a four-fold decrease in σ_ρ by including the C_ρ term in the regression of the datasets. Note the reasonable value of ϕ_c and the critical scaling of $\xi = \sqrt{f_d/f_{dc}}$. The self similarity of the rock structure implied by this model is validated by neutron scattering experiments[5]. Given the value of n_d, simple arguments indicate that the coordination number of the ductile fraction also scales as 0.5. Characteristic

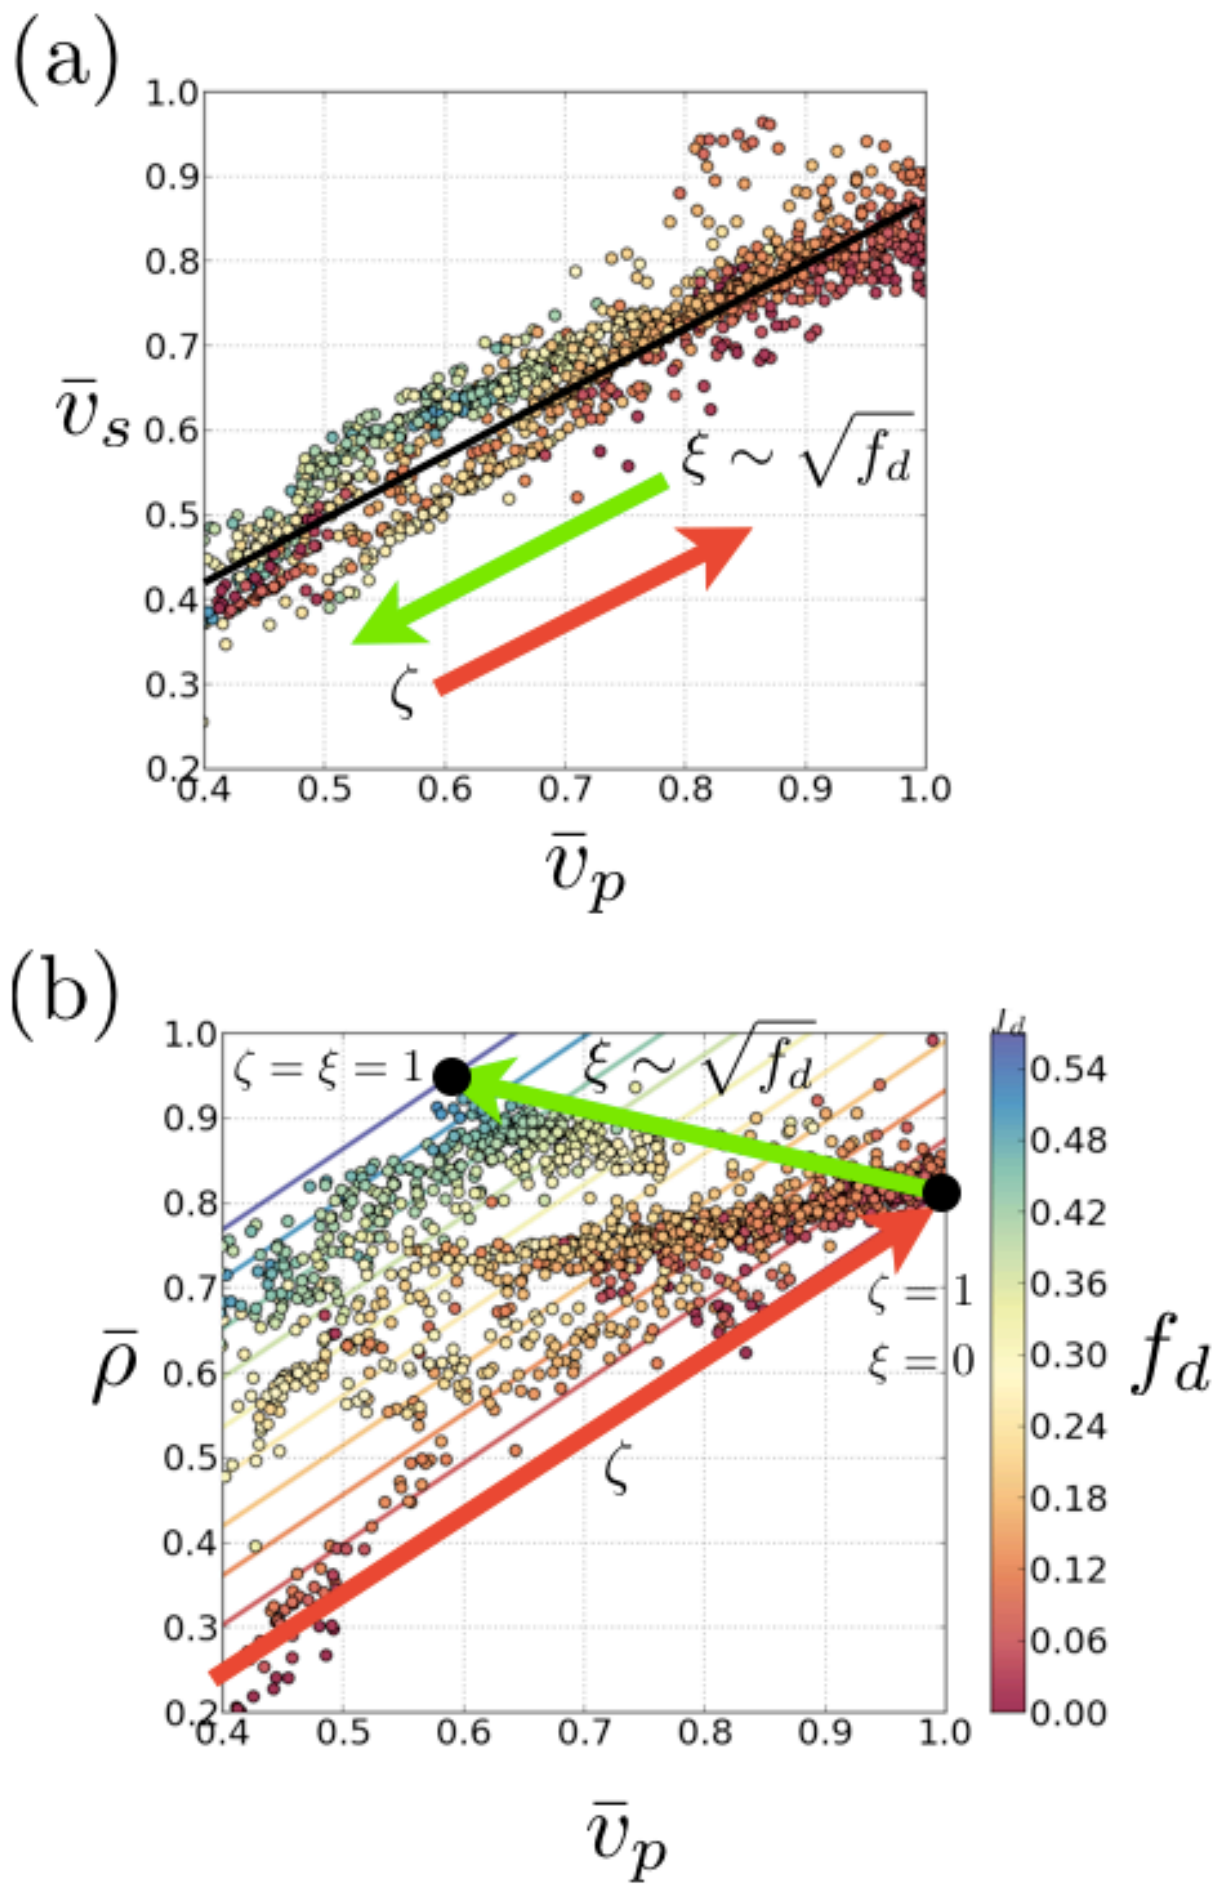

FIG. 1. Well log data supporting rock physics model. Points are blocked well log data colored according to the ductile fraction, f_d. Also shown are the directions of increasing ζ (constant ξ) as the red arrow, and increasing ξ (constant ζ) as the green arrow. Values are normalized according to the equation $\bar{x} = (x - x_{min})/(x_{max} - x_{min})$, where min $v_p = 8000$ ft/s, max $v_p = 18000$ ft/s, min $v_s = 3800$ ft/s, max $v_s = 11000$ ft/s, min $\rho = 2.1$ gm/cc, max $\rho = 2.8$ gm/cc. (a) v_s-v_p trend in normalized units. Black line is the fit trend, Eq. (3). (b) ρ-v_p trend in normalized units. Trend lines of constant ξ, Eq. (1), are colored according to the value of $f_d = f_{dc}\xi^2$. Two reference points are shown as black dots and labeled.

values of the rock physics parameters are $\zeta = 0.75 \pm 0.07$ and $\xi = 0.70 \pm 0.20$. Straight forward analysis shows that the capture fraction, as defined by Demartini and Glinsky[2], scales as $n_\zeta/(n_\zeta - n_\xi)$ and is approximately equal to the reciprocal of the exponent for states away from the critical point. This gives a capture fraction of 92% for this model, and 36% for the floating grain work of Demartini and Glinsky[2].

We have not explicitly identified the process and therefore the "activation energy" in the definition of $\zeta \equiv 1 - \exp(-E/E_0)$. Unlike for the floating grain model, changes in the composition are not limited to compaction (there is probably a very large amount of diagenesis and mineral substitution for shales), and we did not have information on what the controlling variables (i.e., effective stress or temperature) were for each of the well log samples. Practically, this is not a limitation since we are not trying to estimate the energy, E, and that value will be assumed to be a constant for a stratigraphic layer in our analysis.

III. GEOPHYSICAL FORWARD MODEL

We now move to developing an understanding of both the P-to-P, R_{PP}, and the P-to-S, R_{PS}, reflection response for an isotropic medium. We start by assuming weak scattering and make both the further assumptions of small contrast (that is, $\Delta\rho/\rho, \Delta v_p/v_p$, and $\Delta v_s/v_s \ll 1$) and plane waves (eikonal approximation). The latter is a rather complicated assumption on both the frequency and angle of incidence, θ. The expressions for the reflection response will be linear in the contrasts due to the first approximation, with coefficients that are functions of the angle of incidence, θ, and the ratio of the velocities, $r_{sp} \equiv v_s/v_p$. Expanding to 4th order in θ leads to the expressions

$$R_{PP} = \frac{1}{2}\left(\frac{\Delta\rho}{\rho} + \frac{\Delta v_p}{v_p}\right) + \left(-2\, r_{sp}^2 \frac{\Delta\rho}{\rho} + \frac{1}{2}\frac{\Delta v_p}{v_p} - 4\, r_{sp}^2 \frac{\Delta v_s}{v_s}\right)\theta^2 + \left(\frac{2}{3} r_{sp}^2 \frac{\Delta\rho}{\rho} + \frac{1}{3}\frac{\Delta v_p}{v_p} + \frac{4}{3} r_{sp}^2 \frac{\Delta v_s}{v_s}\right)\theta^4 + \mathcal{O}(\theta^6), \quad (6)$$

$$R_{PS} = \left[\left(-\frac{1}{2} - r_{sp}\right)\frac{\Delta\rho}{\rho} - 2\, r_{sp}\frac{\Delta v_s}{v_s}\right]\theta + \left[\left(\frac{1}{12} + \frac{2}{3} r_{sp} + \frac{3}{4} r_{sp}^2\right)\frac{\Delta\rho}{\rho} + \left(\frac{4}{3} r_{sp} + 2\, r_{sp}^2\right)\frac{\Delta v_s}{v_s}\right]\theta^3 + \mathcal{O}(\theta^5). \quad (7)$$

We have been careful to write these expressions in a bilinear form in terms of the small contrast (i.e., $\Delta\rho/\rho, \Delta v_p/v_p, \Delta v_s/v_s$) and the angle of incidence (i.e., θ). This will facilitate the SVD analysis of the next section. Note that the coefficients of this bilinear transformation are only functions of the dimensionless parameter, r_{sp}.

IV. SINGULAR VALUE DECOMPOSITION

We now move onto understanding the relationships between the basic rock physics parameters we wish to know, ξ and ζ, and the geophysical measurement. We do this by establishing a sequence of linear transformations, then examining the important singular value decompositions (SVDs) of that compound transformation. The singular values will give an understanding of detectability of the singular vectors (that is, the required SNR). The singular vectors will tell us what views of the measurement to use and how they are related to the rock physics.

We need to understand the decomposition of χ^2 where

$$W_d\, R_m - W_d\, D\, R \equiv \chi. \quad (8)$$

R is the theoretical value, R_m is the measured value of R, D is a linear distortion of the measurement of R, $W_d = \Sigma_d^{-1} U_d$, Σ_d^{-1} is a diagonal matrix of the standard deviations, $1/\sigma$, and U_d is unitary. Before we continue with understanding the linear structure of χ^2, we need to develop the linear structure of R in more detail. It can be written as a product of the angle matrix, M_θ, the reflection matrix, M_A, and the rock physics matrix, M_{RP},

$$R = M_\theta\, M_A\, M_{RP}\, \Delta r, \quad (9)$$

where $R = M_\theta\, A$, $A = M_A\, \Delta c$, and $\Delta c = M_{RP}\, \Delta r$.

With these definitions in hand we now return to the definition of χ and write it as

$$\chi = W_d\, R_m - W_d\, D\, M_\theta\, M_A\, M_{RP}\, \Delta r. \quad (10)$$

We first make an SVD of $W_d D M_\theta = U_1 \Sigma_1 V_1^T$. We denote $\overline{\Sigma}_1$ as the square matrix formed by dropping the zero rows of Σ_1. We also define $\overline{U}_1$ by dropping the same rows of U_1. We make a second SVD of $\overline{\Sigma}_1 V_1^T M_A M_{RP} = U_2 \Sigma_2 V_2^T$. It can be shown that

$$(\overline{U}_2^T \overline{U}_1^T \chi)^T (\overline{U}_2^T \overline{U}_1^T \chi) = \chi^T \chi, \quad (11)$$

so we are free to redefine χ as $\overline{U}_2^T \overline{U}_1^T \chi$ without changing $\chi^T\chi = \chi^2$, that is the probability distribution. Therefore, we write

$$\chi = \overline{U}_2^T (\overline{U}_1^T W_d) R_m - \overline{\Sigma}_2 V_2^T \Delta r. \quad (12)$$

Let us now make some practical identifications. First of all recognize that $\overline{U}_1^T W_d$ transforms R_m into m "stacks" where m is the dimension of A. We will denote these stacks as R_i. V_2^T is a 2×2 matrix that rotates Δr so that they are orthogonal, $\Delta\tilde{r} = V_2^T \Delta r$. Then the m stacks $\tilde{R}$ are projected by $\overline{U}_2^T$ (a $2 \times m$ matrix) onto the two orthogonal rock physics directions. The two singular values given by the diagonal matrix $\overline{\Sigma}_2$ give the SNR of the estimates of the two orthogonal rock physics parameters. One can directly form the two optimal stacks for estimation of the rock physics parameters by $\overline{U}_2^T \overline{U}_1^T W_d$.

This is still abstract at this point. Let us substitute in the rock physics of the shales given in the latter part of Sec. II. Set the multiplicative distortion to the identity matrix and the data covariance to a diagonal constant of 1. We set the rock physics composition to $\zeta = 0.79$ and the geometry to $\xi = 0.5$. This gives a density of $\rho = 2.59\,\mathrm{gm/cc}$, compressional velocity of $v_p = 14000\,\mathrm{ft/s}$, a shear velocity of $v_s = 8000\,\mathrm{ft/s}$, a v_p to v_s ratio of $r_{ps} = 1.75$, a Poisson ratio of $\nu = 0.26$, and a porosity of $\phi = 16\%$.

For a typical angle of $\theta_m = 30°$, we get the stack weights, $\overline{U}_1^T$, shown in Fig. 2. It should be noted that this result is independent of the rock physics, M_{RP}, and the relationship between the rock physics and the A's, M_A. In the order of decreasing singular value, or SNR, we have R_0 the full PP stack, R_1 the "full" PS stack (in quotes because it is really linearly weighted with θ), then R_2 the AVO PP gradient stack (weighted by θ^2 so that it is the far offsets minus the near offsets). The series continues on with progressively higher θ order weightings of the stacks in an alternating order between the PP and the PS data. The singular values scale as $\lambda_i \sim \theta_m^i$. Continuing with the analysis, we analyze the rotation of Δr onto an orthogonal system $\Delta\tilde{r}$. We find that $\tilde{\zeta}$ is mainly the composition variable ζ and the $\tilde{\xi}$ variable is mainly the geometry variable ξ. Figure 3 shows the $\overline{U}_2^T$ transformation of the stacks, $\tilde{R}$, onto the rock physics variables, $\Delta\tilde{r}$. Note that the full PP stack is the main contribution to the determination of the composition variable, $\tilde{\zeta}$, and the "full" PS stack is the main contribution to the determination of the geometry variable, $\tilde{\xi}$. The AVO PP gradient stack is of minor contribution to either, but it is more aligned with $\tilde{\xi}$ and orthogonal to $\tilde{\zeta}$. The 4th order PP, R_4, is totally negligible.

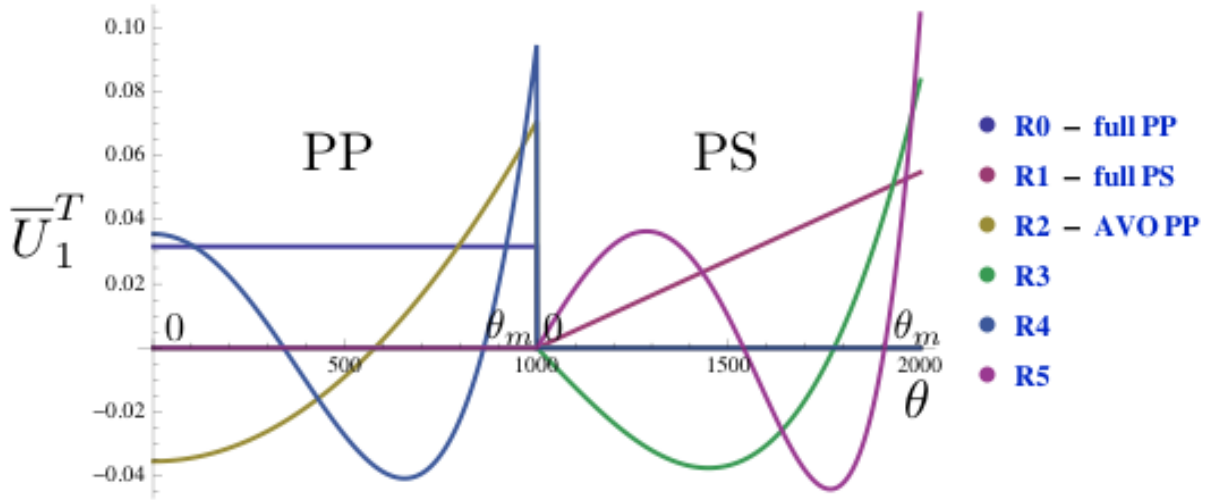

FIG. 2. Stack weights, $\overline{U}_1^T$, as a function of incidence angle, θ. First set is for PP data, followed by the weights for PS data.

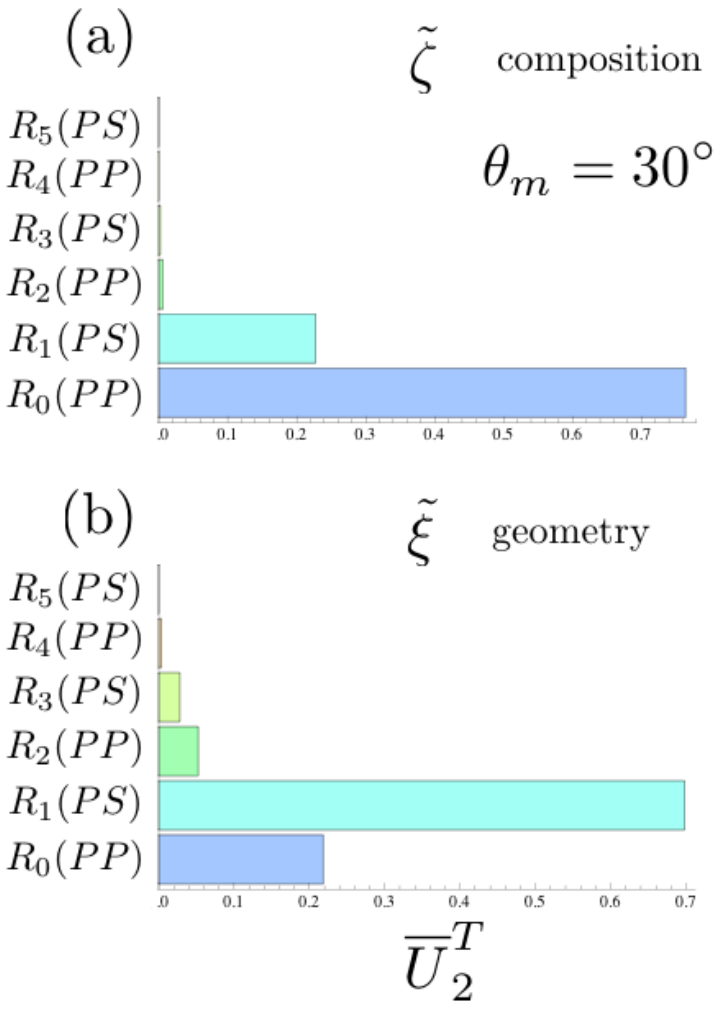

FIG. 3. Transformation of the stacks onto the rock physics parameters, $\overline{U}_2^T$, for $\theta_m = 30°$.

V. CONCLUSIONS

The purpose of this paper has been to establish the underlying fundamentals of quantitative interpretation for unconventional shale reservoirs. This starts with the understanding that it is the ductile fraction that controls the geomechancial balance between the rocky road joint friction of the fractures and the viscous joint friction. While this geomechanics is not the subject of this paper, others[1] have found sensitive dependance of the dynamic friction to the ductile fraction, and a resulting dramatic change in the fracturing efficiency.

Inspired by this geomechanical observation, we developed and verified, at the mesoscopic level, a rock physics model where the three isotropic elastic properties are only a function of two parameters, the scaled ductile fraction, $\xi = \sqrt{f_d/f_{dc}}$, and a composition variable, $\zeta = 1 - \exp\left(-E/E_0\right)$, which captures compaction, diagenesis, and mineral substitution effects. The first variable captures changes in the geometric microstructure, that is how efficient the rock matrix is in supporting stress – modulus per mass or coordination number. The second variable captures the compositional properties of the matrix. It is a remarkable gift of nature that there are only two parameters and that one of them is directly related to the ductile fraction – the critical parameter for the geomechanics.

The next important question that we answered is how this geometry parameter, ξ, manifests itself in surface reflection seismic. The equations relating the rock physics to the reflectivity were all linearized and an SVD analysis was done to answer this question. The leading order singular value was directly related to the full PP stack and the composition, ζ. The next order singular value was directly related to the "full" PS stack and the geometry variable, $\xi = \sqrt{f_d/f_{dc}}$. For reasonable angles of reflection, the higher order stacks, which include the AVO PP gradient stack, all have SNR which would make them hard, if not impossible, to detect.

[1] M. D. Zoback, A. Kohli, and M. McClure, Proceedings of the Americas Unconventional Resources Conference, Pittsburg, PA (2012).

[2] D. Demartini and M. E. Glinsky, J. Appl. Phys. **100**, 014910 (2006).

[3] J. Gunning and M. E. Glinsky, Geophysics **72**, R37 (2007).

[4] F. Blanchette, M. Strauss, E. Meiburg, B. Kneller, and M. E. Glinsky, J. Sedimentary Res. **79**, 817 (2009).

[5] C. Clarkson, N. Solano, R. Bustin, A. Bustin, G. Chalmers, L. He, Y. Melnichenko, A. Radliski, and T. Blach, Fuel **103**, 606 (2013).